



Quality. Performance. Value.

## POLY CRYSTALLINE


## DOUBLE GLASS MODULE

DMG270P6-60ST

Wattages

60x6" /260-270W

260 / 265 / 270

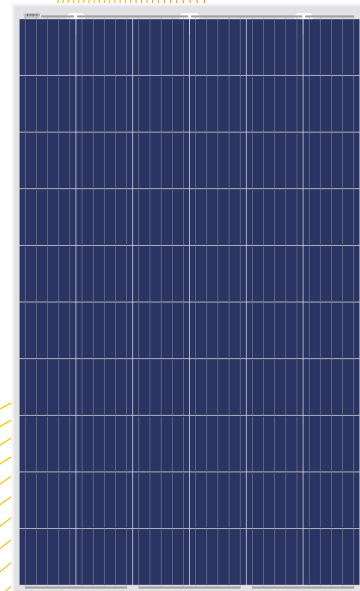

### Technology

High module conversion efficiency through superior manufacturing technology



### PID Free



### Power-Positive Tolerance

Guaranteed power output (0/+3%)



### Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



### Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)



Our vertically integrated business model allows for competitive pricing and great value

[www.dmegcsolar.com](http://www.dmegcsolar.com)

## Superior Manufacturing-Quality Assurance




- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% EL Test-before lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed

## Power Output




- Our IP67 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

## Warranty



- 15 Years Manufacturers Warranty
- 10 Years Warranty, 90% power output
- 30 Years Warranty, 80% power output

## Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly



## Electrical Specifications

\* STC irradiance of 1000W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C

Module Type	Pm(W)	Tolerance	Imp(A)	Vmp(V)	Isc(A)	Voc (V)	Module Efficiency
DMG260P6-60ST	260	0/+3%	8.52	30.52	9.03	38.05	15.66%
DMG265P6-60ST	265	0/+3%	8.63	30.71	9.12	38.23	15.96%
DMG270P6-60ST	270	0/+3%	8.74	30.89	9.21	38.41	16.26%

## Mechanical Data

Cell Type	DMTP5B157X157
Cell Arrangement	60(6x10)
Module Structure	Glass/ EVA / Glass
Glass Thickness	2.0mm/2.0mm(front/back)
Application Class	Class A at IEC 61730
Junction Box Rating	IP 67
Cables	1000(350)mm/4mm <sup>2</sup>
Connector Type	05-8
Fire Rating Class	Class A

## Maximum Ratings


Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow 5400Pa / Wind 2400Pa
Maximum System Voltage	1500V DC(IEC)
Maximum Series Fuse Rating	15A
Number of Diodes	3

## Packaging

Module Dimensions	1664x998x40mm
Weight	22.5kg
Pallet Dimensions	1715x1130x1135
Container	40' HQ
Pieces per Pallet	26
Pallets per Container	28
Pieces per Container	728
Gross Weight per Pallet	625kg
Gross Weight per Container	17,500kg



## Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Isc	+0.057%/°C
Temperature Coefficient of Voc	-0.308%/°C
Temperature Coefficient of Pmax	-0.406%/°C

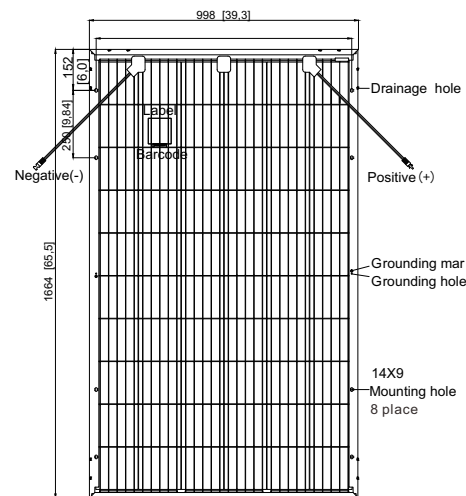

(Back side)  
Note:mm[inch]

Current-Voltage&Power-Voltage Curve(270W)

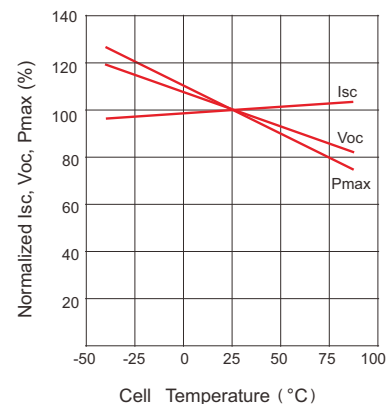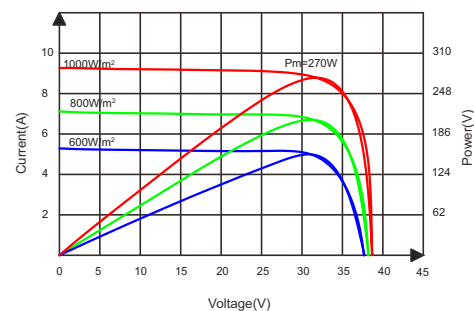

Hengdian Group DMEGC Magnetics Co., Ltd.  
Hengdian Industrial Zone, Dongyang City  
Zhejiang Province, China 322118

Email: solar@dmegc.com.cn  
www.chinadmegc.com www.dmegcsolar.com