


## PERC MONO CRYSTALLINE FRAMELESS DOUBLE GLASS MODULE

DMG300M6-60XT

60 x 6" / 290-300W

Wattages:

290 / 295 / 300

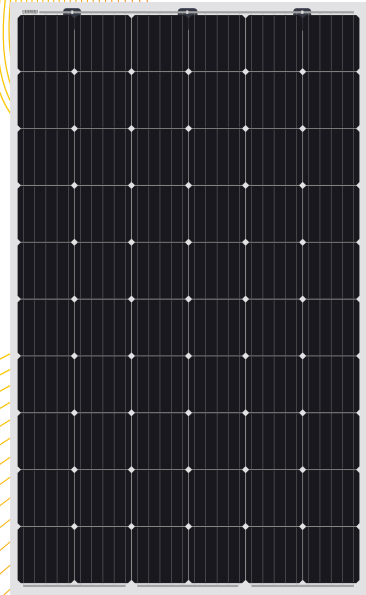

### Technology

High module conversion efficiency through superior manufacturing technology



### Voltage resistance

Module can withstand the 1500V system voltage



### Power-Positive Tolerance

Guaranteed power output (0/+3%)



### Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



### Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)



### Value

Our vertically integrated business model allows for competitive pricing and great value

[www.dmegcsolar.com](http://www.dmegcsolar.com)

## Superior Manufacturing-Quality Assurance




- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% EL Test-before lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed

## Power Output




- Our IP67 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

## Warranty



- 15 Years Manufacturers Warranty
- 10 Years Warranty, 90% power output
- 30 Years Warranty, 80% power output

## Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly



# Electrical Specifications

\* STC irradiance of 1000W/m<sup>2</sup> spectrum AM 1.5 and cell temperature of 25°C

Module Type	Pm(W)	Tolerance	Imp(A)	Vmp(V)	Isc(A)	Voc (V)	Module Efficiency
DM290-M156-60XT	290	0/+3%	9.01	32.19	9.49	39.48	17.63%
DM295-M156-60XT	295	0/+3%	9.11	32.40	9.59	39.64	17.94%
DM300-M156-60XT	300	0/+3%	9.21	32.61	9.69	39.80	18.24%

## Mechanical Data

Cell Type	DMPD4B157-210
Cell Arrangement	60(6x10)
Module Structure	Glass/ EVA / Glass
Glass Thickness	2.5mm/2.5mm(front/back)
Application Class	Class A at IEC 61730
Junction Box Rating	IP 67
Cables	1000(350)mm/4mm <sup>2</sup>
Connector Type	05-8
Fire Rating Class	Class A

## Maximum Ratings


Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow 5400Pa / Wind 2400Pa
Maximum System Voltage	1500V DC(IEC)
Maximum Series Fuse Rating	15A
Number of Diodes	3

## Packaging


Module Dimensions	1658x992x6mm
Weight	22.8kg
Pallet Dimensions	1775x1130x1160
Container	40' HQ
Pieces per Pallet	30
Pallets per Container	26
Pieces per Container	780
Gross Weight per Pallet	760kg
Gross Weight per Container	19,760kg

## Temperature Characteristics


Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Isc	+0.060%/°C
Temperature Coefficient of Voc	-0.300%/°C
Temperature Coefficient of Pmax	-0.390%/°C

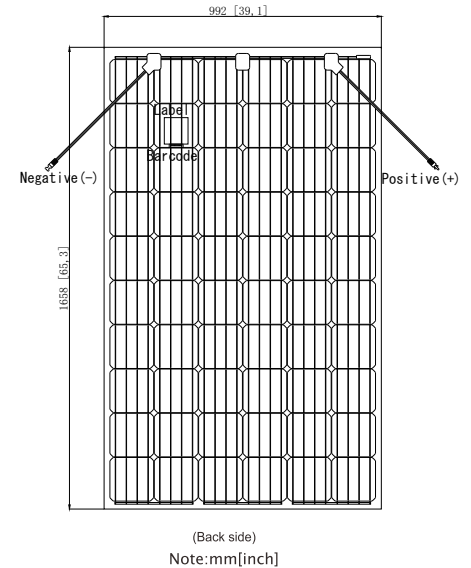

Current-Voltage&Power-Voltage Curve(300W)

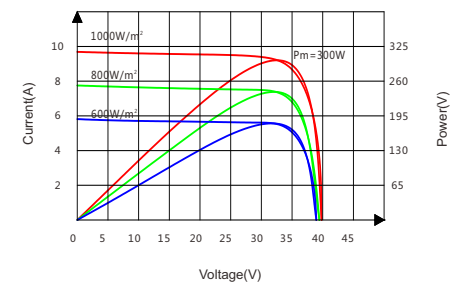

Temperature Dependence of Isc, Voc, Pmax

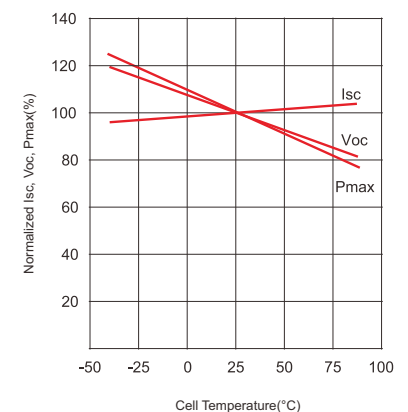

Hengdian Group DMEGC Magnetics Co., Ltd.  
Hengdian Industrial Zone, Dongyang City  
Zhejiang Province, China 322118

Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845  
Email: solar@dmegc.com.cn  
www.chinadmegc.com www.dmegcsolar.com