


DM370M6-B60HBB

360 | 365 | 370 Wp

double glass; bifacial; half cut monocrystalline cells, anodised black aluminum frame

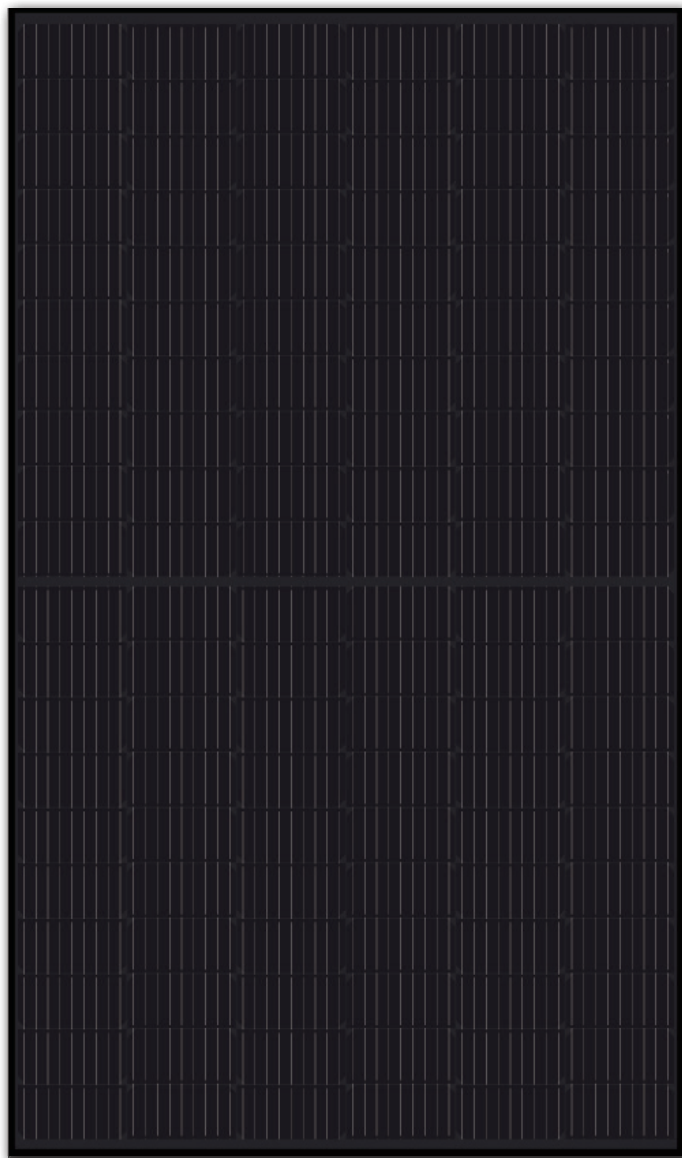

TECHNOLOGY

High module conversion efficiency



VALUE

Our vertically integrated business model results in competitive pricing



POWER POSITIVE TOLERANCE

Guaranteed power output 0 - 3 %



PERFORMANCE

Good performance under low light conditions



QUALITY

Manufacturing according to international quality and environmental management systems




HALF CELL TECHNOLOGY

Reduces power loss





PID FREE

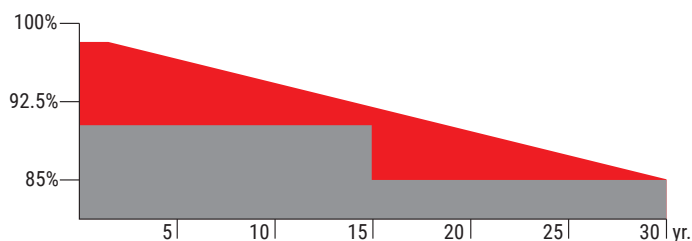According to IEC TS 62804-1 standards



WARRANTY

- 30 years warranty of 85% power output
- 15 years manufacturers warranty

 DMEGC Solar's linear guarantee
 standard solar panel guarantee



CHUBB



Tier 1



Electrical specifications

Module type	P _m (W)	P _m + 10%*	P _m + 20%*	P _m + 30%*	Tolerance	I _{mp} (A)	V _{mp} (V)	I _{sc} (A)	V _{oc} (V)	Efficiency
DM360M6-B60HBB	360	396	432	468	0 - 3 %	10.70	33.67	11.12	41.42	19.76 %
DM365M6-B60HBB	365	402	438	475	0 - 3 %	10.80	33.82	11.22	41.57	20.04 %
DM370M6-B60HBB	370	407	444	481	0 - 3 %	10.91	33.95	11.32	41.72	20.31 %

*) Example of power increase due to BiFacial gain

STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°

Mechanical data

cell type	P-type monocrystalline (½)
cell arrangement	6 x 20
module structure	glass / glass
glass thickness (front back)	2.8 mm 2 mm
PV module classification	class II
junction box rating	IP68
cables	4 mm ² ; 1100 mm*
connector type	MC4 / MC4 Compatible
fire class rating	class A

* optional customized length

Maximum ratings

operational temperature	-40 °C to +85 °C
max. snow load	5400 Pa
max. wind load	2400 Pa
max. system voltage	1000V DC (IEC)
max. series fuse rating	25 A
diodes	3

Temperature characteristics



temperature coefficient of I _{sc}	+ 0.0487 % / °C
temperature coefficient of V _{oc}	- 0.256 % / °C
temperature coefficient of P _{max}	- 0.328 % / °C

Packaging

module dimensions	1755 x 1038 x 35 mm
weight	27.6 kg
container	40' HQ
pieces per pallet	31
modules per container	806

Declaration: Due to continuous technology innovation, the above indicated parameters are subject to change without prior announcement. Upon contract/ order confirmation, our company's latest data shall be the final version.

Current - voltage & power voltage curves

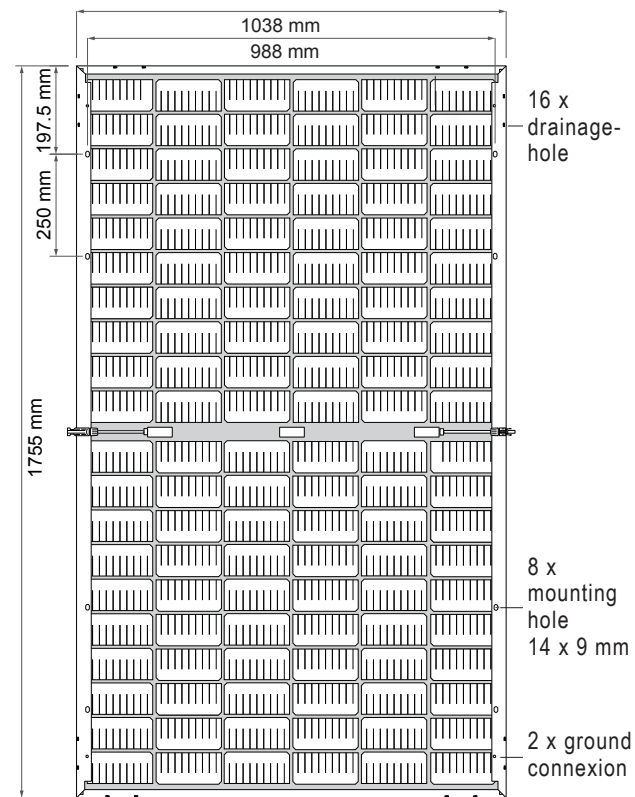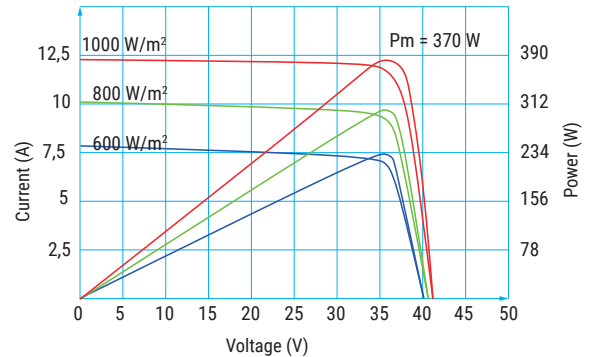

Temperature dependence of I_{sc}, V_{oc}, P_{max}

