




Product Service

CERTIFICATE

No. Z2 076043 0091 Rev. 02

Holder of Certificate: Hengdian Group DMEGC Magnetics CO., LTD
Hengdian Industrial Zone,
322118 Dongyang, Zhejiang
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

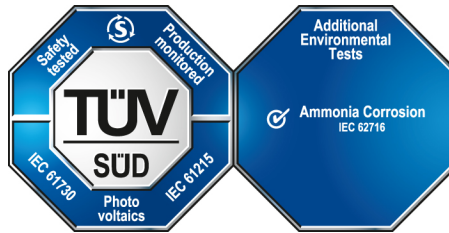

Product: Crystalline Silicon Terrestrial Photovoltaic (PV) Modules
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704061905408-02

Valid until: 2025-07-13

Date, 2020-07-15

(Zhulin Zhang)

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFIKAT ◆ CERTIFICATE

CERTIFICATE

No. Z2 076043 0091 Rev. 02

Model(s):

DMxxx-M156-72, (xxx=335-375, in steps of 5)
 DMxxx-M156-60, (xxx=280-310, in steps of 5)
 DMHxxxM6-144SW, (xxx=340-385, in steps of 5)
 DMHxxxM6-120SW, (xxx=280-320, in steps of 5)
 DMxxx-M156-72P, (xxx=335-375, in steps of 5)
 DMxxx-M156-60P, (xxx=280-310, in steps of 5)
 DMxxx-M156-36P, (xxx=175-190, in steps of 5)
 DMxxx-M159-72, (xxx=385-395, in steps of 5)
 DMxxx-M159-60, (xxx=315-330, in steps of 5)
 DMHxxxM6A-144SW, (xxx=380-405, in steps of 5)
 DMHxxxM6A-120SW, (xxx=320-350, in steps of 5)
 DMxxxM6-72HSW, (xxx=415-450, in steps of 5)
 DMxxxM6-60HSW, (xxx=345-375, in steps of 5)
 DMxxxM6-72HBW, (xxx=415-450, in steps of 5)
 DMxxxM6-60HBW, (xxx=345-375, in steps of 5)
 DMHxxxM6A-144BW, (xxx=380-405, in steps of 5)
 DMHxxxM6A-120BW, (xxx=320-350, in steps of 5)
 DMxxxG1-60SW, (xxx=315-330, in steps of 5)
 DMxxxG1-60BW, (xxx=315-330, in steps of 5)
 DMxxxG1-60HSW, (xxx=320-350, in steps of 5)
 DMxxxG1-60HBW, (xxx=320-350, in steps of 5)
 DMxxxG1-72SW, (xxx=385-395, in steps of 5)
 DMxxxG1-72BW, (xxx=385-395, in steps of 5)
 DMxxxG1-72HSW, (xxx=380-405, in steps of 5)
 DMxxxG1-72HBW, (xxx=380-405, in steps of 5)
 DMxxxM2-60SW, (xxx=280-310, in steps of 5)
 DMxxxM2-60BW, (xxx=280-310, in steps of 5)
 DMxxxM2-60HSW, (xxx=280-320, in steps of 5)
 DMxxxM2-60HBW, (xxx=280-320, in steps of 5)
 DMxxxM2-72SW, (xxx=335-375, in steps of 5)
 DMxxxM2-72BW, (xxx=335-375, in steps of 5)
 DMxxxM2-72HSW, (xxx=340-385, in steps of 5)
 DMxxxM2-72HBW, (xxx=340-385, in steps of 5)
 xxx is standing for the rated output power at STC

Parameters:

Safety Class:	Class II
Max. System Voltage:	1500V DC
Construction:	Framed, with Junction box, cable and connector.
Fire Safety Class:	Class C according to UL790.

Tested according to:

IEC 61215-1:2016
 IEC 61215-1-1:2016
 IEC 61215-2:2016
 IEC 61730-1:2016
 IEC 61730-2:2016
 IEC 62716:2013

Production Facility(ies): 076053