


PERC MONO CRYSTALLINE MODULE

DM330G1-66BU

315 / 320 / 325 / 330

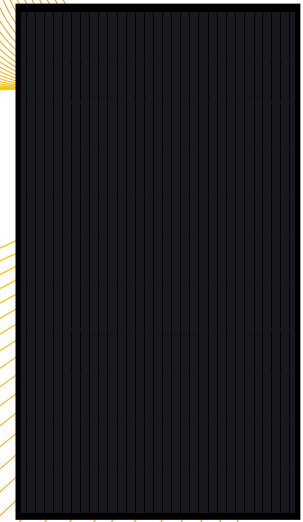

Technology

High module conversion efficiency through superior manufacturing technology



PID Free

Excellent PID resistance according to IEC TS 62804-1



Power-Positive Tolerance

Guaranteed power output(0/+3%)



Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)



Value

Our vertically integrated business model allows for competitive pricing and great value

www.dmegcsolar.com

Superior Manufacturing-Quality Assurance




- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% EL Test-before lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed

Power Output




- Our IP68 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

Warranty



- 12 Years Manufacturers Warranty
- Linear Power Output Warranty, no less than 80.2% at year 25th

Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly




Electrical Specifications

* STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°C

Module Type	Pm(W)	Tolerance	Imp(A)	Vmp(V)	Isc(A)	Voc (V)	Module Efficiency
DM315G1-66BU	315	0/+3%	8.86	35.61	9.27	44.22	17.31%
DM320G1-66BU	320	0/+3%	8.95	35.79	9.36	44.38	17.59%
DM325G1-66BU	325	0/+3%	9.04	35.97	9.45	44.54	17.86%
DM330G1-66BU	330	0/+3%	9.15	36.11	9.54	44.70	18.14%

Mechanical Data

Cell Type	DMPD5B159-223
Cell Arrangement	66(6x11)
Module Structure	Glass/EVA/Backsheet(black/inside black)
Glass Thickness	3.2mm
Application Class	Class A at IEC 61730
Junction Box Rating	IP67/IP68
Cables	1000mm/4mm ²
Connector Type	MC4/MC4 Compatible
Fire Rating Class	C

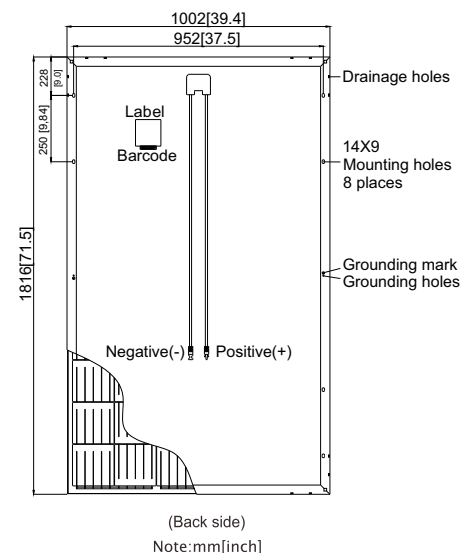

Maximum Ratings

Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa
Maximum System Voltage	1000V DC(IEC)
Maximum Series Fuse Rating	20A
Number of Diodes	3


Packaging

Module Dimensions	1816x1002x35mm
Weight	20.6kg
Pallet Dimensions	1865x1130x1140mm
Container	40' HQ
Pieces per Pallet	31
Pallets per Container	24
Pieces per Container	744
Gross Weight per Pallet	680kg
Gross Weight per Container	16320kg


Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42°C±3°C
Temperature Coefficient of Isc	+0.038%/°C
Temperature Coefficient of Voc	-0.270%/°C
Temperature Coefficient of Pmax	-0.365%/°C

Current-Voltage&Power-Voltage Curve(330W)

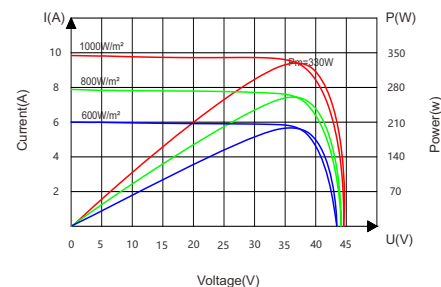

Temperature Dependence of Isc, Voc, Pmax(°C)

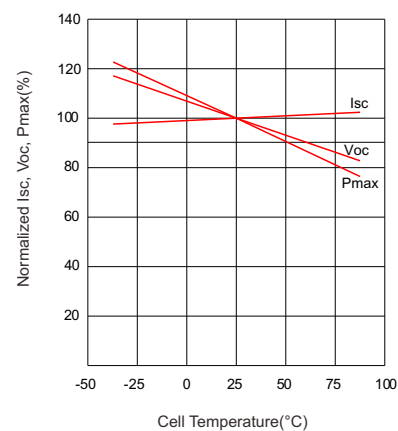

Hengdian Group DMEGC Magnetics Co., Ltd.
Hengdian Industrial Zone, Dongyang City
Zhejiang Province, China 322118

Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845
Email: solar@dmegc.com.cn
www.chinadmegc.com www.dmegcsolar.com